



## Aritco 7000 Platform Lift



### **Aritco 7000** - our bestselling platform lift

The lift is designed to meet all requirements for quality, safety and service life. It is a perfect fit for tough and demanding environments such as schools, shops and residential buildings.

Several advantages offered by Aritco 7000:

- Design, sizes and options tailored to public environments
- 95% recyclable materials
- 'A' rated energy consumption according to VDI4707
- Patented screw/nut technology (no oil that can leak)
- The lowest maintenance and operating costs on the market

[Download Drawings](#)

[Visit Gallery](#)


[Get Quote](#)

# Aritco 7000 Platform Lift



Length


Width



Wheelchair Type A and B according to EN 12183/EN 12184.


\* National guidelines may apply

**900 x 1040**




Hole through floor: 1330x1190 mm  
(No door on B-side: 1305x1190)  
Platform: 900x1040 mm  
Load: 250 kg

**900 x 1280**




Hole through floor: 1330x1430 mm  
(No door on B-side: 1305x1430)  
Platform: 900x1280 mm  
Load: 410 kg

**900 x 1480**

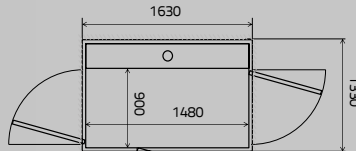


Hole through floor: 1330x1630 mm  
(No door on B-side: 1305x1630)  
Platform: 900x1480 mm  
Load: 410, 500 kg

**1000 x 1280**




Hole through floor: 1430x1430 mm  
(No door on B-side: 1405x1430)  
Platform: 1000x1280 mm  
Load: 410 kg

**1000 x 1480**

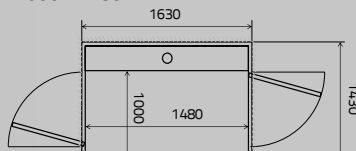


Hole through floor: 1430x1630 mm  
(No door on B-side: 1405x1630)  
Platform: 1000x1480 mm  
Load: 410, 500 kg  
Wheelchair: A or B with attendant\*

**1000 x 1980**

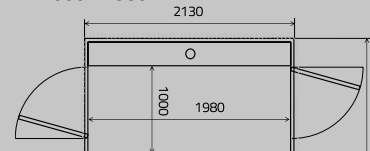


Hole through floor: 1430x2130 mm  
(No door on B-side: 1405x2130)  
Platform: 1000x1980 mm  
Load: 500 kg  
Wheelchair: A or B with attendant\*

**1100 x 1480**

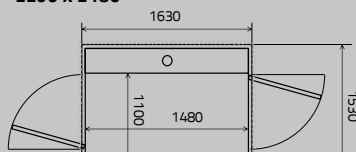

Hole through floor: 1530x1630 mm  
(No door on B-side: 1505x1630)  
Platform: 1100x1480 mm  
Load: 410, 500 kg  
Wheelchair: A or B with attendant, adjacent entry\*

**1100 x 1580**



Hole through floor: 1530x1730 mm  
(No door on B-side: 1505x1730)  
Platform: 1100x1580 mm  
Load: 500 kg  
Wheelchair: A or B with attendant, adjacent entry\*

[Download Drawings](#)

[Visit Gallery](#)

## Dimensions

Platform width..... 900-1100 mm  
Platform length..... 1040-1980 mm  
Travel height..... 250-13000 mm

Hole through floor width..... 1305-1530 mm  
Hole through floor length .....1190-2130 mm  
Top height.....2240 mm

Height of door opening\*.. 1800, 1900, 2000, 2100 mm  
Height of door opening\*\* .....1100-1600 mm  
Width of door opening ..... 800, 900, 1000 mm

\*Full-height door \*\*Half-height door

**Drive system:** Patented screw/nut system

**Rated speed:** max 0.15m/s

**Platform control:** "Hold to run", the button has to be kept pressed during the ride

**Landing control:** One-touch call

**Technical compliance:** European Machinery Directive 2006/42/EC  
European standard EN 81-41

**Rated load:** 250-500 kg / 2-5 persons

**Number of stops:** max 6

**Number of doors:** max 2 doors per floor

**Pit:** 50 mm (no pit is required when there is a ramp)

**Environment:** Indoors and outdoors

**Power supply:** 1-phase 230V 50Hz/9A/16A slow  
3-phase 230V 50Hz/9A/16A slow  
3-phase 400V 50Hz/5.2A/16A slow

**Emergency lowering:** Battery-powered

**Control voltage:** 24V

**Motor:** 2.2kW

For more information, please, refer to our product catalogue or visit our website.

Due to the continuous product development at the company, the information may change without prior notice.



EVO Lifts Ltd  
International House, Southampton International Business Park  
George Curl Way, Southampton SO18 2RZ.

Telephone: 0203 195 3958  
Email: sales@evolifts.co.uk

[Get Quote](#)